






DEA CAGE SPECIFICATION AND DETAILS

Description

Details that differentiate from standard Cogan Safegarde partitions.



MESH TYPES


SPECIFICATION

Cogan DEA cages meet both the US Drug Enforcement Administration's requirements for physical security of Schedule III through IV controlled substances as stipulated in Title 21 CFR Sections 1301.72-1301.76 physical security controls, and the Health Canada Directive on Physical Security Requirements for Controlled Substances. Below are the details that differentiate from standard Cogan Safegarde partitions.


1- SPECIFIC MESH REQUIRED



DEA Cages within the United States require 1" x 1" or 1" x 2" welded wire mesh.




1"x 1" Welded wire mesh
10GA (0.135)




2"x 1" Welded wire mesh
10GA (0.135)



DEA Cages within Canada require flattened expanded metal 10GA with 1" x 2" diamond shaped openings.



Flattened expanded metal 10GA with
1" x 2" diamond shaped openings




PLEASE VERIFY THE SECURITY REQUIREMENTS OF YOUR PROJECT IN ORDER TO
SELECT THE APPROPRIATE TYPE OF MATERIAL.




SPECIFICATION

2- PANELS WITH 2" SWEEP

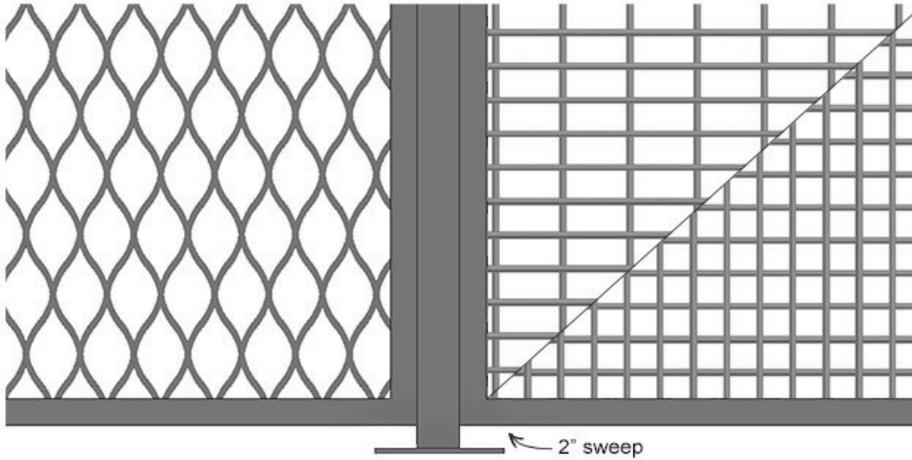


OPTIONAL: 2" gap can be covered by 1 1/4" x 1 1/4" angle to create a 3/4" sweep.



2- SELF-CLOSING DOORS

Specially designed self-closing doors: inclined sliding track system for sliding doors and spring-loaded hinges for swing doors.

SELF-CLOSING DOOR OPTION: ANGLED SLIDING TRACK

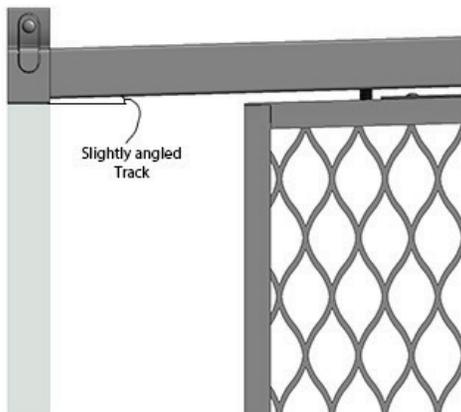

SELF-CLOSING DOOR OPTION: SPRING-LOADED HINGES



4-ROOFS

Roof panels meet the same material specifications if the security enclosures does not reach the structural ceiling of the building.
Roofs are non-load bearing.

5-HARDWARE

Components are fastened with tamper-proof, anti-theft nuts and bolts.



6-LOCKS

Cogan will work in association with your chosen locksmith to design custom mounting plates or other materials that will match your company's standard locking system.